


# TECHNICAL DATA SHEET

## FOAM SILICONE

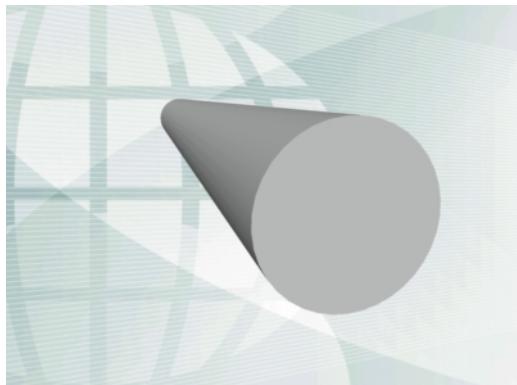

Powder Coating,  
Silicone Sponge cord  
Very flexible and usable for different  
dimensions.  
Easy to fit and adapt to the groove to mask

SPECIFICATIONS	
Colour	WHITE
Durometer Range	From 25 to 35 ShA
Tensile Strength Range	>7.5 Mpa
Elongation at Break	750%
Density	0.5 g/cm <sup>3</sup>
Tear Strength	>15 KN/m
Compression Set	<6%
Linear Shrinkage	3.6-4.0%
Dielectric Strength	>20kV/mm

We suggest to test our Silicone Masking products before submitting them to following fluids: concentrated oils, solvents, acids and bases including diluted ones.

GLOBALMASK is fully committed to the manufacture and supply of a wide family of masking products. We supply them since many years, and our customers are fully satisfied with the quality of our products. We are proud to listen to our customers demands with the objective to continuously increase our product portfolio without compromising their performance. Our quality control procedures are applied during the production of all our masking products. GLOBALMASK reserves the right to modify products with, however, the intention to improve their performance. In such a case we will always keep our customers informed.